



ULTRA SLIM SLIDE

*Designed for use with 1U and 2U chassis
up to 435 mm wide and 34 kg*

Features & Benefits

- **One profile** accommodates 1U and 2U chassis, with loads up to 34 kg [75 lbs.]. UL 60950-1 tested.
- **Accommodates larger chassis** up to 435 mm [17.12"] wide.
- **Ball bearing movement** – provides smooth travel for heavier chassis up to 2Us.
- **Over travel** – up to 76.2 mm [3"] of over travel provides to rear of chassis.
- **Sequenced movement** – ensures slide members travel successively to optimize use of cable management systems.
- **Lock-out feature** – secures chassis in open position for safe and secure servicing.
- **Drop and lock chassis mounting** – notches on slide accommodate tool less pin mounting of chassis. Keyhole mounting and screw mounting also available.
- **Tool less brackets** – attachment points customized to specific requirements.
- **Customizable options** – hole patterns, brackets, chassis attachment configuration, cable management systems.
- Clear zinc finish
- RoHS compliant

For additional information or to discuss your project needs, please contact your local Accuride representative or email us at oemdirect@accuride.com.

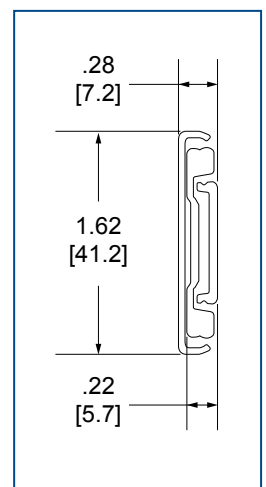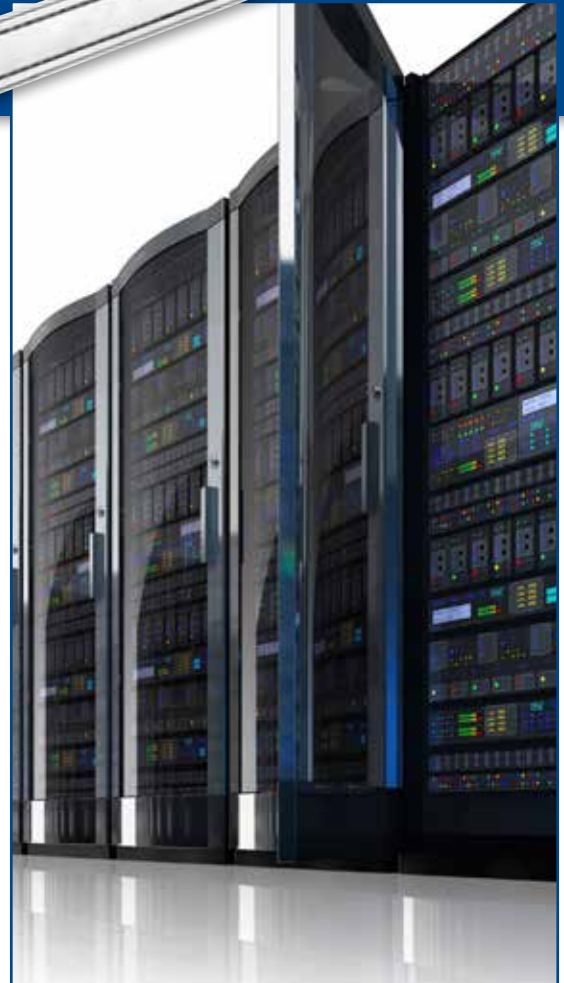

Accuride[®]
Always Moving Forward