




应用场景：电子机柜，卡车车体，工业抽屉/托盘，机械自动化，医疗设备等领域

滑轨 C 3600系列

中型承载滑轨，最高可达124kg/pr，全行程，不可拆分安装。

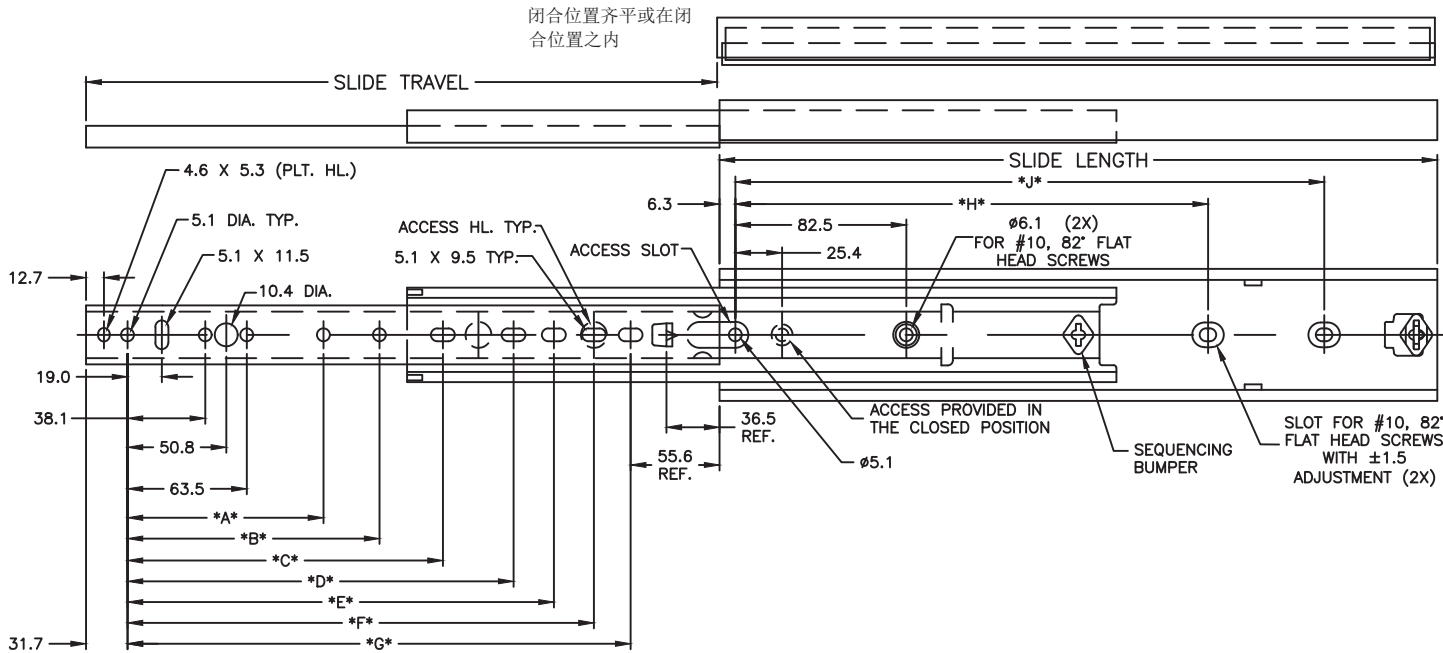

Model C 3600 shown

表面处理： 电镀蓝白锌

长度： 12" – 28" [305 mm – 711 mm]

高度： 2.09" [53.1 mm]

承载： 最大可达124kg/pr

滑轨厚度： 0.75" +.015/- .000 [19.1 mm +0.4/- 0.0]

滑轨行程： 等于滑轨长度

安装方式： 锁螺丝

螺丝型号： M4/M5 圆头螺丝/#8/#10(英制)

是否可拆分： 滑轨内轨不可拆分

SLIDE LENGTH	SLIDE TRAVEL	LOAD RATING (LB.)	*A* ±.015[.4]	*B* ±.015[.4]	*C* ±.015[.4]	*D* ±.015[.4]	*E* ±.015[.4]	*F* ±.015[.4]	*G* ±.015[.4]	*H*	*J*
10.00[254]	10.00[254]	276	—	—	—	4.06[103.0]	5.06[128.5]	5.81[147.6]	6.56[166.6]	6.25[158.8]	8.50[215.9]
12.00[305]	12.00[305]	273	—	—	—	6.06[154.0]	7.06[179.4]	7.81[198.4]	8.56[217.5]	8.25[209.6]	10.50[266.7]
13.00[330]	13.00[330]	270	—	—	—	7.06[179.4]	8.06[204.8]	8.81[223.8]	9.56[242.9]	9.25[235.0]	11.50[292.1]
14.00[356]	14.00[356]	267	—	—	—	8.06[204.8]	9.06[230.2]	9.81[249.2]	10.56[268.3]	10.25[260.4]	12.50[317.5]
15.00[381]	15.00[381]	264	5.00[127.0]	—	—	9.06[230.2]	10.06[255.6]	10.81[274.6]	11.56[293.7]	11.25[285.8]	13.50[342.9]
16.00[406]	16.00[406]	261	5.00[127.0]	—	—	10.06[255.6]	11.06[281.0]	11.81[300.0]	12.56[319.1]	12.25[311.2]	14.50[368.3]
17.00[432]	17.00[432]	257	5.00[127.0]	—	—	11.06[281.0]	12.06[306.4]	12.81[325.4]	13.56[344.5]	13.25[336.6]	15.50[393.7]
18.00[457]	18.00[457]	253	5.00[127.0]	—	9.56[242.9]	12.06[306.4]	13.06[331.8]	13.81[350.8]	14.56[369.9]	14.25[362.0]	16.50[419.1]
19.00[483]	19.00[483]	248	5.00[127.0]	—	10.56[268.3]	13.06[331.8]	14.06[357.2]	14.81[376.2]	15.56[395.3]	15.25[387.4]	17.50[444.5]
20.00[508]	20.00[508]	244	5.00[127.0]	7.50[190.5]	11.56[293.7]	14.06[357.2]	15.06[382.6]	15.81[401.6]	16.56[420.7]	16.25[412.8]	18.50[469.9]
21.00[533]	21.00[533]	239	5.00[127.0]	7.50[190.5]	12.56[319.1]	15.06[382.6]	16.06[408.0]	16.81[427.0]	17.56[446.1]	17.25[438.2]	19.50[495.3]
22.00[559]	22.00[559]	233	5.00[127.0]	7.50[190.5]	13.56[344.5]	16.06[408.0]	17.06[433.4]	17.81[452.4]	18.56[471.5]	18.25[463.6]	20.50[520.7]
23.00[584]	23.00[584]	227	5.00[127.0]	7.50[190.5]	14.56[369.9]	17.06[433.4]	18.06[458.8]	18.81[477.8]	19.56[496.9]	19.25[489.0]	21.50[546.1]
24.00[610]	24.00[610]	220	5.00[127.0]	7.50[190.5]	15.56[395.3]	18.06[458.8]	19.06[484.2]	19.81[503.2]	20.56[522.3]	20.25[514.4]	22.50[571.5]
25.00[635]	25.00[635]	212	5.00[127.0]	7.50[190.5]	16.56[420.7]	19.06[484.2]	20.06[509.6]	20.81[528.6]	21.56[547.7]	21.25[539.8]	23.50[596.9]
26.00[660]	26.00[660]	203	5.00[127.0]	7.50[190.5]	17.56[446.1]	20.06[509.6]	21.06[535.0]	21.81[554.0]	22.56[573.1]	22.25[565.2]	24.50[622.3]
27.00[686]	27.00[686]	193	5.00[127.0]	7.50[190.5]	18.56[471.5]	21.06[535.0]	22.06[560.4]	22.81[579.4]	23.56[598.5]	23.25[590.6]	25.50[647.7]
28.00[711]	28.00[711]	182	5.00[127.0]	7.50[190.5]	19.56[496.9]	22.06[560.4]	23.06[585.8]	23.81[604.8]	24.56[623.9]	24.25[616.0]	26.50[673.1]

*滑轨承载能力是基于滑轨长度450mm，抽屉宽度400mm，载荷均匀分布状态下，通过至少10000次循环测试，及滑轨完全打开状态，24小时的两倍载荷静载测试。



雅固拉国际精密工业（苏州）有限公司

苏州工业园区苏虹东路178号

Tel: 0086-512-62731200

www.accuride.com.cn